




KONGERIKET NORGE

The Kingdom of Norway

NO 99/00187

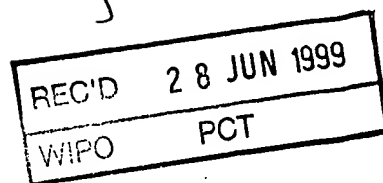

#5

## Bekreftelse på patentsøknad nr

*Certification of patent application no*

1998 2626

► Det bekreftes herved at vedheftede dokument er nøyaktig utskrift/kopi av ovennevnte søknad, som opprinnelig inngitt 1998.06.08

► It is hereby certified that the annexed document is a true copy of the above-mentioned application, as originally filed on 1998.06.08

COMPLIANCE WITH RULE 17.1(a) OR (b)  
SUBMITTED OR TRANSMITTED IN

**PRIORITY  
DOCUMENT**

1999.06.18

*Freddy Strømmen*

Freddy Strømmen  
Seksjonsleder

*Mette E. Hansen*

Mette E. Hansen



**PATENTSTYRET**  
Styret for det industrielle rettsvern

Til  
Patentstyret  
Boks 8160 Dep.  
0033 Oslo

Søknadsreferanse  
(Søknets):

63605-SS

Oppfinnelsens  
benevnelse:

Hvis søknaden er  
en internasjonal søknad  
som videreføres etter  
patentlovens § 31:

Søker:

Navn, bopel og adresse.  
(Hvis patent søkes av flere,  
Opplysning om hvem som skal  
være bemyndiget til å motta  
meddelelser fra Styret på vegne  
av søkerne).

(Fortsett om nødvendig på neste side)

Oppfinner:

Navn og (privat-) adresse.

(Fortsett om nødvendig på neste side)

Fullmektig:

Hvis søknad tidligere  
er inngitt i eller  
for riket:

(Fortsett om nødvendig på neste side)

Hvis avdelt søknad:

Hvis utskilt søknad:

Deponert kultur av  
mikroorganisme:

Utlevering av prøve av  
kulturen:

982626

Angivelse av tegnings-  
figur som ønskes  
publisert sammen med  
sammendraget

SØKNADSSKJEM

la - k

Utfylles av Styret

08. JUN 98 982626

Behandlende medlem

Int. Cl<sup>5</sup>

F 26 B

M2

Alm.tilgj

- 9 DES. 1998

8. jun 98 634539

P982626 1

1.000,00

Method and apparatus for drying a porous matrix

Frøpangsmåte og apparat for tørking.

T. H.

Den internasjonale søknads nummer

Den internasjonale søknads inngivelsesdag

Nyfotek AS

R. Birkelands vei 3 A  
7034 TRONDHEIM

Tandbergs Patentkontor AS

Prioritet kreves fra dato... Ingen ... sted ... nr. ...

Prioritet kreves fra dato... sted ... nr. ...

Prioritet kreves fra dato... sted ... nr. ...

Den opprinnelige søknads nr. ... og dennes inngivelsesdag ...

Den opprinnelige søknads nr. ... begjært inngivelsesdag ...

☐ Søknaden omfatter kultur av mikroorganisme

☐ Prøve av den deponerte kultur av mikroorganisme skal bare utleveres til en særlig sakkyndig,  
jfr. patentlovens § 22 åttende ledd og patentforskriftens § 38 første ledd

Fig. nr. ....

POSTADRESSE  
Boks 8160 Dep.  
0033 Oslo

KONTORADRESSE  
Københavnsgt. 10  
Oslo

TELEFON  
22 38 73 00

TELEKS  
19 152  
nopat n

TELEFAKS  
22 38 73 01

POSTGIRO  
0808 5170709

BANKGIRO  
1600.40.39916

63605-SS

The present invention is related to a method and an apparatus for producing a porous matrix from a solution, a paste, an extract, a granulated material or such, and the drying  
5 process.

Developments are continuously made to make processes and apparatus and connectors with freeze drying more economical, more accurate, to a higher degree capturing aromatic and nutritious ingredients during the freeze drying process.

10 With the method and the apparatus according to present invention, the dryer may operate at different temperature levels and inlet conditions below the freezing point of the material, enabling removal of substantial amount of moisture within a shorter residence time.

15 With the method according to the present invention is provided a flexibility on the operation since a solution, a suspension, a paste, juices, extract and even finely granulated sticky products can be mixed with an inert agent and expanded as to form a porous matrix. Said porous matrix is progressively  
20 dried as it is introduced into the drying chamber, said drying chamber thereby comprising means to adjust the inlet conditions as provided by the heat exchanger and the blower.

By closed loop circulation of the drying air or other media, processing contaminations are avoided and a maximum  
25 retention of the final product aroma or odorants as well as other heat sensitive organic components, which would have been lost in open processes.

Uncoupled heat exchangers provide conditioned drying media at appropriate and different levels as to attain minimum  
30 thermal inactivation while avoiding degradation of heat sensitive or delicate products. To avoid environmental and thermal pollutions, natural refrigerants are used in the uncoupled heat exchangers.

The above described advantages are achieved with the  
35 method and the apparatus according to the present invention as defined with the features stated in the claims.

The drawing discloses in Figure 1 schematically an apparatus according to the invention and Figure 2 discloses enlarged a control valve used in the apparatus in Figure 1.

According to the invention, an inert agent is introduced into the structural raw material which may be a solution, a paste, an extract, a granulated material or such, whereafter the raw material is expanded to above or below the freezing point of the raw material and to a lower pressure, thereby producing a matrix mainly consisting of solids, pores and ice crystals. The resulting matrix may be frozen prior, or during the drying process or may be directly introduced into drying chamber.

The frozen matrix is placed into the drying chamber of the apparatus whereafter the dryer is activated. The moisture removed from the matrix is guided as an exhaust medium through a heat exchanger having cooled surface coils in which the water vapour condenses and thereafter is removed from the drying circuit.

In the next phase the drying medium is conditioned to the desired and preset inlet condition of the drying chamber by using the heated surface of the heat exchanger. This process is repeated continuously as the drying medium is reentered the drying chamber containing the matrix.

With the apparatus according to the present invention the inert agent is mixed with a matrix in a controlled mixing process. For this purpose the apparatus comprises several components also for conditioning the drying medium.

Reservoir 1 for the inert agent and reservoir 2 for the raw material are preferably made of stainless steel. The outlet of said reservoirs is accurately controlled for fine proposing of the mass fractions, by the use of flow meters and control valves. Pressure and temperature at the reservoir inlets and outlets are recognized by sensors and indicators arranged in the reservoir piping, fittings and connections.

The dryer as such consists of a closed loop in which the drying medium flows after being conditioned in the heat exchanger. The surfaces of the heat exchanger may be independently heated respectively cooled or may as such be connected with the appropriate refrigeration systems and heat pumps.

A blower, when activated, provides the flow of the drying medium through drying chamber containing the fixed or

fluidized bed of porous frozen matrix, whereafter the drying as such is accomplished by heat transfer and mass transport mechanisms. The heated and cooled surfaces of the heat exchanger promote dehumidification and conditioning of the drying medium and  
5 may be adjusted to provide desired specification and thermal sensitivity of the matrix by specific chamber designs and preset inlet conditions.

With the method and apparatus according to the present invention the dryer is able to operate at different temperature  
10 levels and the inlet conditions may be preset at or below the final freezing point of the raw material, such that nearly all of the moisture in the matrix is removed. In connection therewith, the circuit temperature of the heat exchanger may be changed in order to increase the temperature of the drying  
15 medium, controlling the relative humidity and consequently attaining a high degree of water removal and a short residence time of the matrix.

The design of the dryer as such enables use of only a fraction of the energy used in conventional processes.  
20 Furthermore the closed drying circuit avoids contamination as such, as frequently observed with commercial open systems.

Due to the higher operation temperature and higher operation pressure, the drying process according to the present invention is less expensive than commonly available drying  
25 systems having similar capacities. Furthermore the final product from the dryer provides higher and more uniform quality than conventional dryers and spray dryers operating at much higher temperature which furthermore is unsuitable for heat sensitive materials.


30 The only figure discloses schematically the apparatus arrangement with its vital components. A liquid inert agent is fed into a vessel 5 at controlled pressure and amount through a valve 7. The valve 7 also permits dosing the amount of inert agent inside vessel 5, as inspected through glass level indicator  
35 8.

From the vessel 5 the pressurized liquid inert agent is transferred to the mixing vessel 4 which also receives the solution (paste, extract or granulated material) through an inlet valve 10. The pressure and temperature inside the mixing vessel

4 is adjusted through the release valve 6. A multi-propeller agitator 9 rotates accordingly to provide a complete mixing of the inert agent with the solution.

From the mixing vessel 4, the solution is expanded into a porous matrix and is injected into drying circuit through the drying chamber 3. The matrix is kept suspended in the drying chamber by the flowing drying medium, which is supplied by the blower 2.

Besides keeping the porous matrix suspended during the process, the medium re-circulates the drying circuit in a closed loop. After removing the matrix moisture the exhaust medium is moved through a heat exchanger coil comprising a first heat exchanger 11 where the water vapour is condensed and removed from the circuit. Thereafter the drying medium is adjusted to the desired inlet condition in the heat exchanger 1. Finally the drying medium flows through the matrix and the process is repeated.



20

25

30

35


63605-SS-

P a t e n t   C l a i m s

5            1. Method of drying a medium for producing a porous matrix from a solution, a paste, an extract, a granulated material or such, **CHARACTERIZED IN** feeding a liquid inert agent into a vessel (5) at controlled pressure and amount through a valve (7), transferring the pressurized liquid inert agent to a  
10 mixing vessel (4), said mixing vessel (4) also receiving the solution, such as paste, extract or granulated material, through an inlet valve (10), adjusting the pressure and temperature inside the mixing vessel (4) to desired levels by a release valve (6), upon complete mixing of the inert agent with the solution,  
15 the mixture is expanded into a porous matrix and injected into a drying circuit through a drying chamber (3), the matrix thereby being kept suspended in the drying chamber by the flowing drying medium, supplied by the blower 2, the matrix moisture being removed from the mixture through a heat exchanger coil comprising  
20 a first heat exchanger (11) where the water vapour is condensed and removed from the circuit and finally the drying medium is adjusted to the desired inlet condition in a heat exchanger (1) before the drying medium flows through the matrix and the process is repeated.

25            2. Apparatus adapted for drying a medium for producing a porous matrix from a solution, a paste, an extract, a granulated material or such, **CHARACTERIZED IN** the apparatus comprising a valve (7) being connected with a vessel (5) for feeding a liquified inert agent into the vessel (5) at controlled  
30 pressure and rate, the valve (7) thereby allowing dosing of the agent, a mixing vessel (4) being connected with the vessel (5) adapted to receive pressurized liquid inert agent as well as a solution such as a paste, an extract or a granulated material, through an inlet valve (10), a release valve (6) thereby  
35 controlling the pressure and the temperature inside the mixing vessel (4), an agitator (9) inside the mixing vessel (4) thereby ensuring complete mixing of the agent with the solution, a drying chamber (3) being connected with the mixing vessel (4) to receive the mixture as a porous matrix which thereby is injected into a

drying circuit through the drying chamber (3), and a first heat exchanger (10) being connected with the circuit for condensing and removing the water vapour from the circuit, the drying medium thereafter being adjusted to the inlet condition of the drying chamber (3) by a second heat exchanger (1).



10

15

20

25

30

35



## Abstract

Method of drying a medium for producing a porous matrix from a solution, a paste, an extract, a granulated material or such, where a liquid inert agent is fed into a vessel (5) at controlled pressure and amount through a valve (7), transferring the pressurized liquid inert agent to a mixing vessel (4), said mixing vessel (4) also receiving the solution, such as paste, extract or granulated material, through an inlet valve (10), adjusting the pressure and temperature inside the mixing vessel (4) to desired levels by a release valve (6), upon complete mixing of the inert agent with the solution, the mixture is expanded into a porous matrix and injected into a drying circuit through a drying chamber (3), the matrix thereby being kept suspended in the drying chamber by the flowing drying medium, supplied by the blower 2, the matrix moisture being removed from the mixture through a heat exchanger coil comprising a first heat exchanger (11) where the water vapour is condensed and removed from the circuit and finally the drying medium is adjusted to the desired inlet condition in a heat exchanger (1) before the drying medium flows through the matrix and the process is repeated.



